


# Product data sheet

Push-button interface, 2-gang

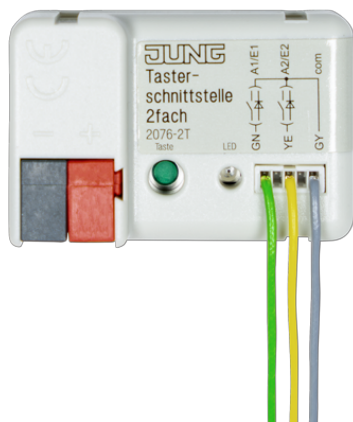

<b>Reference number</b>	
2076-2 T	
<b>KNX push-button interface, 2-gang</b>	
ETS product family: Input Product type: Binary input	
<b>Product characteristics</b>	
<ul style="list-style-type: none"> <li>- Can be used as binary input</li> <li>- Can be used as switching output, e.g. for LEDs, max. 0.8 mA</li> </ul>	
<b>Technical data</b>	
KNX medium:	TP 256
<b>Inputs</b>	
Number:	2
Signal voltage:	5 V
Signal current:	> 1 mA
Connection mode:	branching terminal, 5 pins
Length of input cable:	25 cm prefabricated, extendable to 5 m max
<b>Outputs</b>	
Output voltage:	5 V with 3.9 kΩ series resistor (open-circuit voltage)
Output current:	2 mA for red low-current LED (at approx. 1.4 V)
Dimensions (W x H x D):	28 x 43 x 16 mm